

REFERANSLARIMIZ


tema
klemp




TEMA BAĞLANTI ELEMANLARI MAK. İML. SAN. TİC. LTD. ŞTİ.
Sultan Orhan Mah. 1164 Sokak No: 11 Gebze / Kocaeli / Türkiye
Tel. : +90 262 644 05 33 Gsm: +90 549 137 19 97
info@temaklemp.com.tr - www.temaklemp.com.tr




32-01

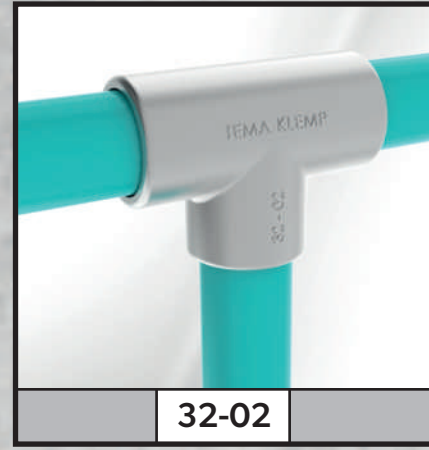


32-02

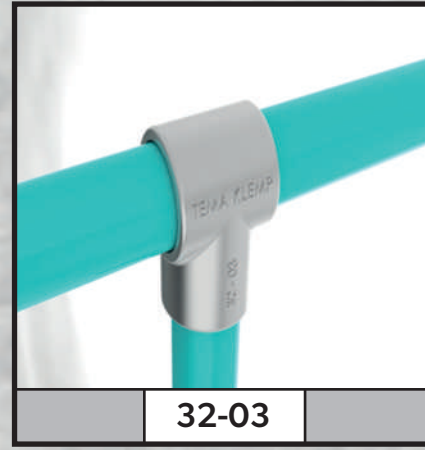


32-03

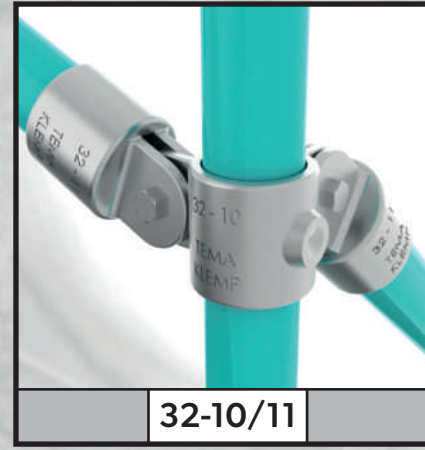


32-10/11

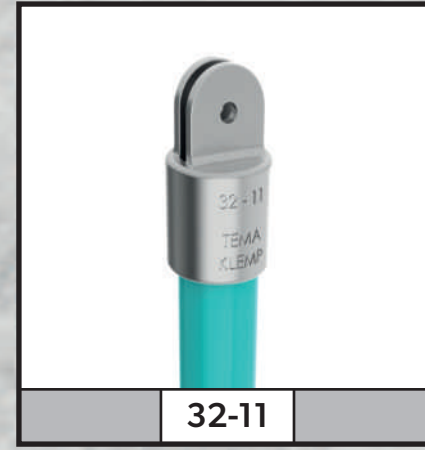


32-11

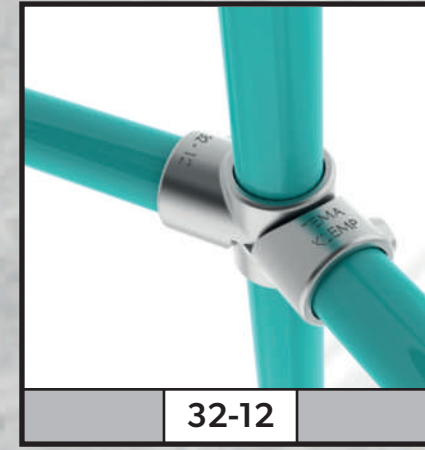

32-12

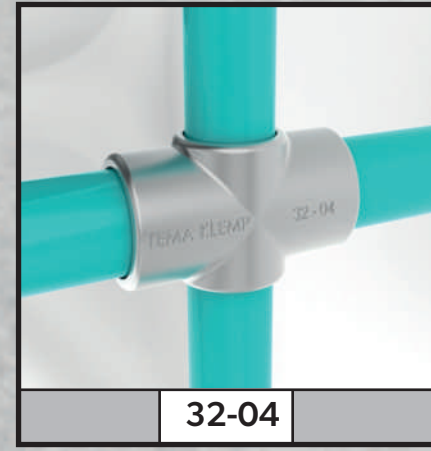


32-04

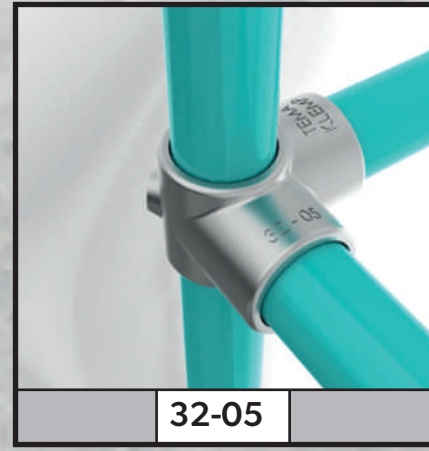

32-05




32-06

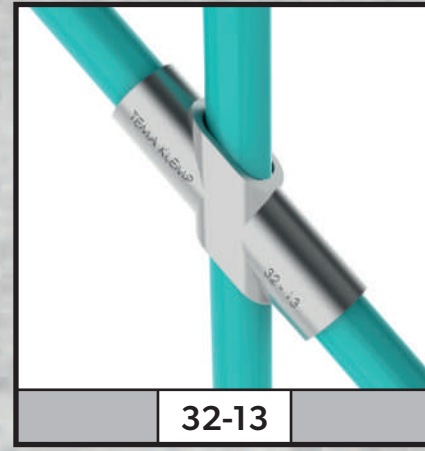


32-13




32-14

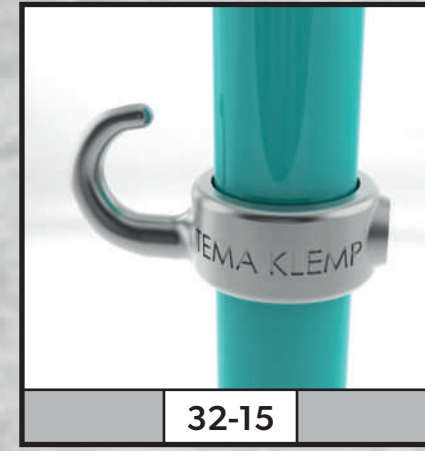

32-15

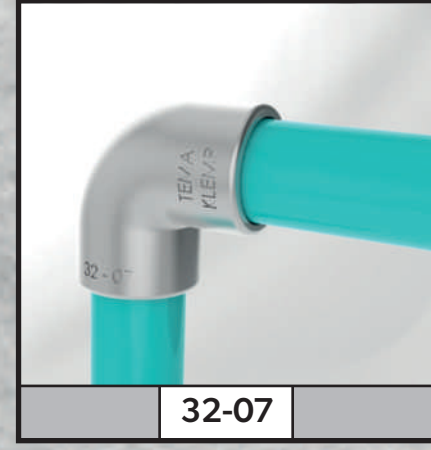


32-07

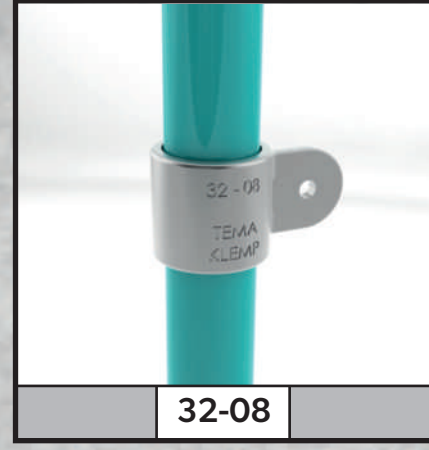


32-08



32-08/11

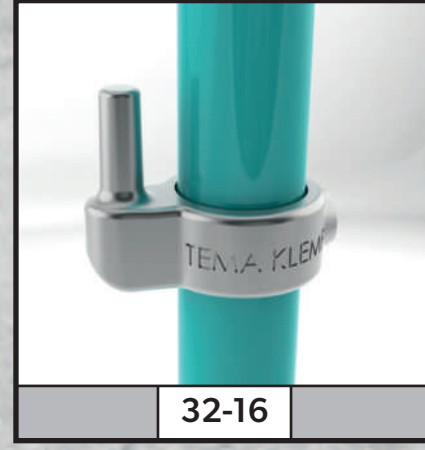


32-16

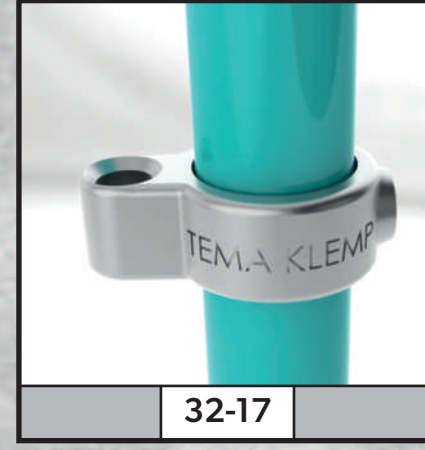

32-17




32-18

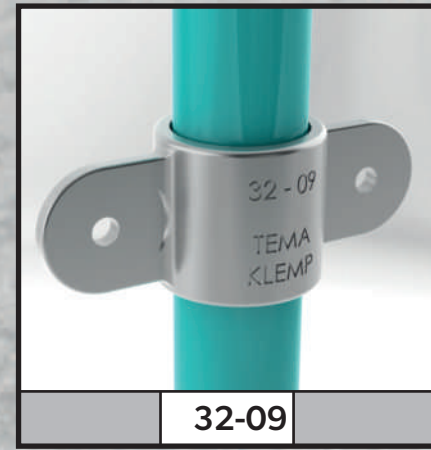


32-09



32-09/11

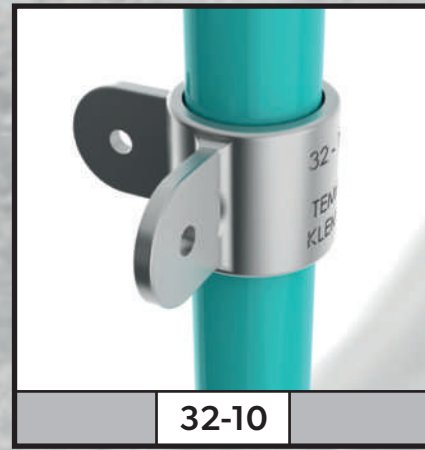

32-10

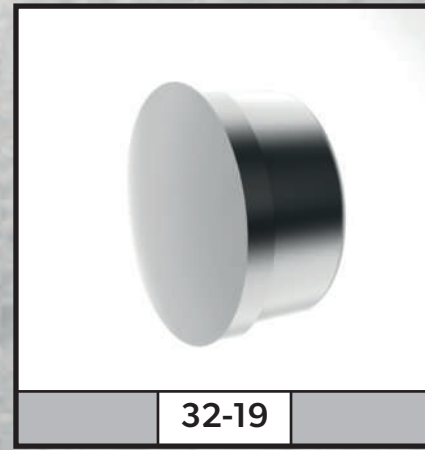

32-19



Tekmelik Sac

DN32 Sıcak Daldırma
Galvanizli Boru

TEMA KLEMP ÜRÜNLERİ İLE İLGİLİ GENEL TEKNİK BİLGİ

Tema klemp boru bağlantı elemanları; korkuluk, çit, iskele, raf gibi sistemlerin oluşturulmasında kullanılmak amacıyla üretilmiştir. Tema klemp ürünleri sfero döküm olarak üretilmiş ve bu sayede kırılma, çatlama ve deformasyon gibi istenmeyen kusurlar ortadan kaldırılmıştır. Ayrıca döküm üzerine sıcak daldırma galvaniz kaplama metodu ile kaplanarak korozyon dayanımı ileri derecede artırılmıştır. Tamamen vida bağlantılı birleştirmeye uygun olarak tasarlanmış ve farklı modeller sayesinde istenilen şekil ve tarzda montaj yapılabilme kabiliyetine kavuşturulmuştur. Bu sayede tüm montajlar kaynak işlemi kullanılmadan yapılmaktadır. Modellerimiz DN 32 (Ø 42,4 mm) boru çapına uygun olarak tasarlanmış ve üretilmiştir.

GENERAL TECHNICAL INFORMATION ABOUT TEMA CLAMP PRODUCTS

Tema Clamp pipe fittings; It has been produced to be used in the creation of systems such as railings, fences, scaffolding, shelves. Tema clamp products are produced as ductile iron and thus undesirable defects such as breakage, cracking and deformation have been eliminated. In addition, the corrosion resistance has been enhanced by coating the casting with the hot-dip galvanized coating method. It has been designed completely by screw connection and has gained the ability to be assembled in the desired shape and style thanks to different models. In this way, all assemblies are made without the use of welding. Our models are designed and manufactured by DN 32 (Ø 42.4 MM) pipe diameter

